


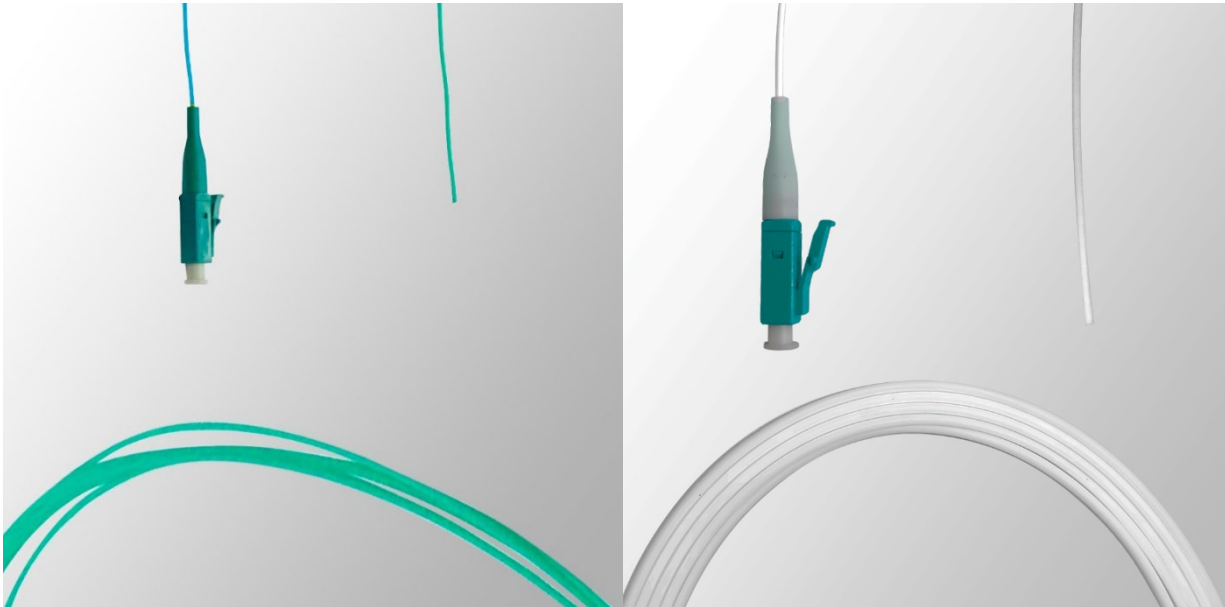

LC Multimode Simplex Pigtail.

Cable	Connector	LC
	Fiber Type	OM4
	Fiber core	50/125 μm
	Jacket Type	LSZH
	Jacket Colour	Aqua Or White
	Jackt Thickness (mm)	0.45 +/- 0.05
	Cable Diameter (mm)	900 μm
Optical Specification	Insertion Loss	Typical: <0.2 dB, Max. 0.3 dB
	Return Loss	PC > 45 dB, UPC > 50 dB
Mechanical Specification	Connector Ferrule	Ceramic
	Fiber Height	$\pm 100\text{nm}$
	End-ace Radius of Curvature	7mm < R < 25 mm
	Repeatability	1,000 times mating cycles
	Polishing Type	PC or UPC
Temperature	From - 40 °C to + 85 °C	
General	Test standard: IL <=0.3 dB, RL>50dB@1310 nm;	